

MDST three-phase autotransformer

P:5400VA IN:3x380/400/420VAC OUT:3x230VAC -1x220VAC

Autotransformer


5 400 VA

Isolation class T 40/B

Other voltages on request.

[Link a termékhez](#)

Ábrák

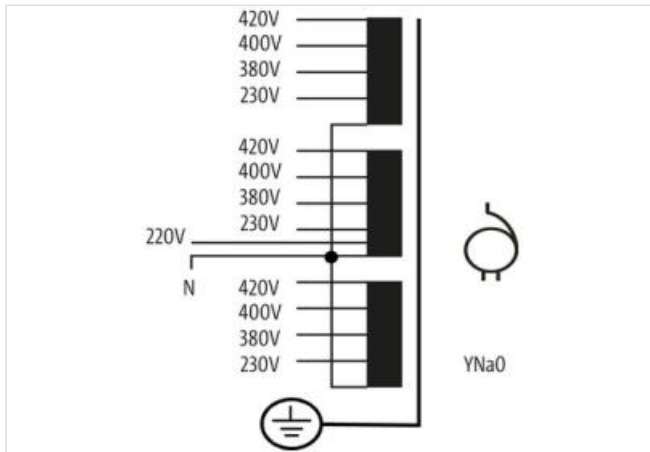

Szimbolikus ábra



Commercial data

| | |
|-----------------------|---------------|
| ECLASS-6.0 | 27031301 |
| ECLASS-6.1 | 27031301 |
| ECLASS-7.0 | 27031301 |
| ECLASS-8.0 | 27031301 |
| ECLASS-9.0 | 27031301 |
| ECLASS-10.1 | 27031301 |
| ECLASS-11.1 | 27031301 |
| ECLASS-12.0 | 27031301 |
| ETIM-5.0 | EC002485 |
| customs tariff number | 85043200 |
| GTIN | 4048879589628 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

Electrical data | Input

| | |
|-------------------------------------|-------|
| Input voltage 1 AC | 380 V |
| Input voltage 2 AC | 400 V |
| Input voltage 3 AC | 420 V |
| Input current at input voltage 1 AC | 8,4 A |
| Input current at input voltage 2 AC | 8 A |

| | |
|--|-------|
| Inrush current at input voltage 1 | 56 A |
| Inrush current at input voltage 2 | 54 A |
| Inrush current at input voltage 3 | 52 A |
| Short-circuit current at input voltage 1 | 300 A |
| Short-circuit current at input voltage 2 | 286 A |
| Short-circuit current at input voltage 3 | 272 A |
| Phase number input | 3 |

Electrical data | Output

| | |
|----------------------|------------------------|
| Output voltage | 3 × 230 / 1 × 220 V AC |
| Output voltage AC 1 | 220 V |
| Output voltage AC 2 | 230 V |
| Power rating AC max. | 5400 VA |

Device protection | Electrical

| | |
|------------------------------------|--------|
| Insulation test voltage input - PE | 2,9 kV |
|------------------------------------|--------|

Mechanical data | Mounting data

| | |
|----------------------------|-------------------------|
| Suitable for mounting type | Schlüssellochaufhängung |
| Mounting dimension a | 71 mm |
| Mounting dimension b | 176 mm |
| Height | 90 mm |
| Width | 230 mm |
| Depth | 205 mm |
| Diameter bore | 9 mm |
| Length bore | 13 mm |

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 40 °C |
| Storage temperature min. | -40 °C |
| Storage temperature max. | 80 °C |