

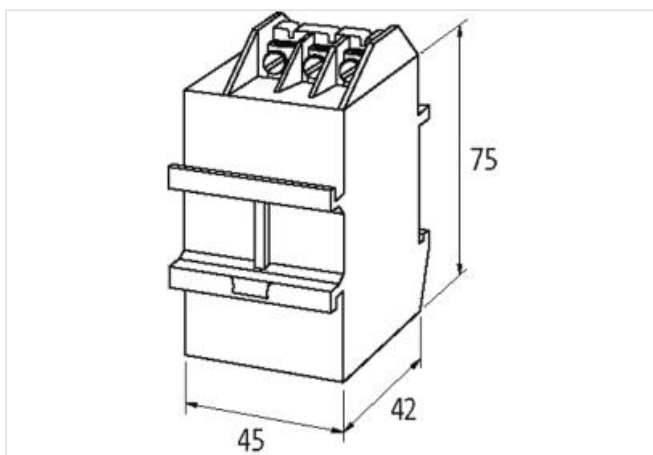
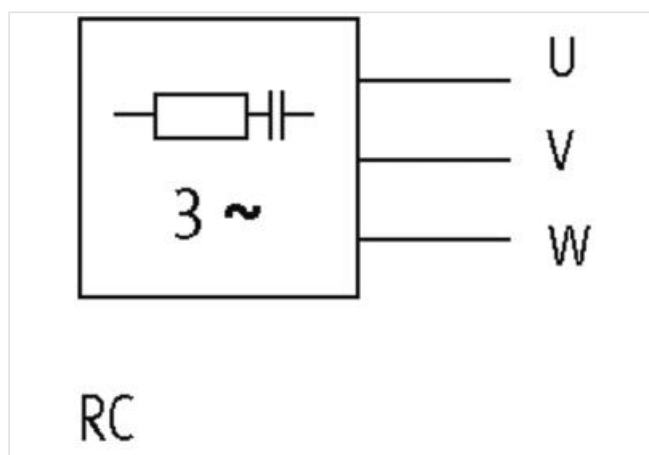
**MOTOR SUPPRESSOR**

RC, 3x500VAC/4kW

3× 500 V AC +10%

RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

**[Link a termékhez](#)****Ábrák**

Szimbolikus ábra

**Commercial data**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27371013 |
| ECLASS-6.1  | 27371013 |
| ECLASS-7.0  | 27371013 |
| ECLASS-8.0  | 27371013 |
| ECLASS-9.0  | 27371013 |
| ECLASS-10.1 | 27371013 |

|                                                 |                      |
|-------------------------------------------------|----------------------|
| ECLASS-11.1                                     | 27371013             |
| ECLASS-12.0                                     | 27371013             |
| ETIM-5.0                                        | EC000197             |
| customs tariff number                           | 85363010             |
| GTIN                                            | 4048879019668        |
| Packaging unit                                  | 1                    |
| <b>Electrical data   Supply</b>                 |                      |
| Power frequency                                 | 50 ... 60 Hz         |
| <b>Electrical data   Input</b>                  |                      |
| Input voltage AC                                | 500 V                |
| <b>Installation</b>                             |                      |
| Connection cross-section solid min.             | 0,75 mm <sup>2</sup> |
| Connection cross-section solid max.             | 2,5 mm <sup>2</sup>  |
| <b>Installation   Connection</b>                |                      |
| Connection information                          | terminal             |
| Family construction form                        | M4                   |
| <b>Installation   Pin assignment</b>            |                      |
| No. of poles                                    | 3                    |
| <b>Device protection   Media</b>                |                      |
| Flame resistance                                | flame retardant      |
| <b>Mechanical data   Material data</b>          |                      |
| Combustibility class housing (UL94)             | V-0                  |
| Material housing                                | Plastic              |
| Material potting compound                       | 2-component epoxy    |
| <b>Mechanical data   Mounting data</b>          |                      |
| Height                                          | 75 mm                |
| Width                                           | 45 mm                |
| Depth                                           | 42 mm                |
| <b>Environmental characteristics   Climatic</b> |                      |
| Operating temperature min.                      | -20 °C               |
| Operating temperature max.                      | 60 °C                |