

**EUROCARD HOLDER**

SKT 32 C

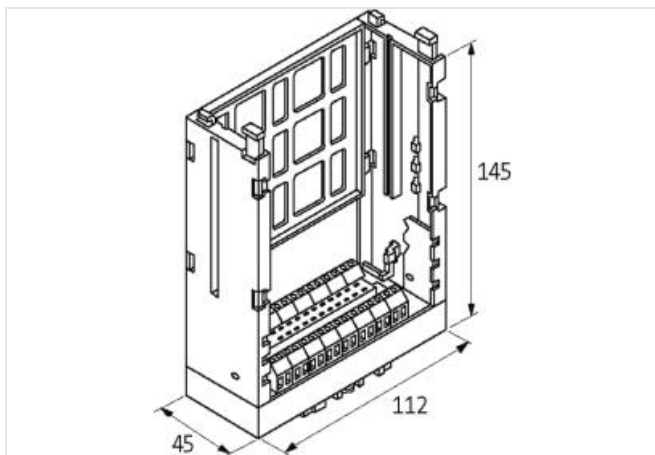
Screw terminals

32-pole C (EN 60603)

Row a, c

The D2 size is for a card without a front plate.

To insert the card first press down the 2 yellow buttons. Then slide the Eurocard into the guide slots pushing until fully engaged. The card is now locked into position. It can be removed by pressing down on the 2 yellow buttons.

[Link a termékhez](#)**Ábrák**

Szimbolikus ábra

**Commercial data**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27260710 |
| ECLASS-6.1 | 27260704 |
| ECLASS-7.0 | 27440402 |
| ECLASS-8.0 | 27440402 |

|                                        |                                                 |
|----------------------------------------|-------------------------------------------------|
| ECLASS-9.0                             | 27460201                                        |
| ECLASS-10.1                            | 27440402                                        |
| ECLASS-11.1                            | 27460201                                        |
| ECLASS-12.0                            | 27460201                                        |
| ETIM-5.0                               | EC002780                                        |
| customs tariff number                  | 85366990                                        |
| GTIN                                   | 4048879041980                                   |
| Packaging unit                         | 1                                               |
| <b>Electrical data   Supply</b>        |                                                 |
| Operating voltage AC                   | 250 V                                           |
| Operating current max.                 | 2 A                                             |
| <b>Installation</b>                    |                                                 |
| Connection cross-section solid max.    | 4 mm <sup>2</sup>                               |
| <b>Installation   Pin assignment</b>   |                                                 |
| No. of poles                           | 32                                              |
| <b>Device protection   Electrical</b>  |                                                 |
| Overvoltage category (EN 60664-1)      | I                                               |
| <b>Device protection   Media</b>       |                                                 |
| Flame resistance                       | flame retardant                                 |
| <b>Mechanical data</b>                 |                                                 |
| Type of socket connector               | C (EN 60603)                                    |
| <b>Mechanical data   Material data</b> |                                                 |
| Material housing                       | Plastic                                         |
| <b>Mechanical data   Mounting data</b> |                                                 |
| Mounting method                        | screwed, geschnappt                             |
| Suitable for mounting type             | horizontal, vertical, mounting rail, (EN 60715) |
| Height                                 | 112 mm                                          |
| Width                                  | 45 mm                                           |
| Depth                                  | 145 mm                                          |