

MSVD POWER SOCKET NEMA (GFCI)

Mounting rail

USA (2× NEMA-GFCI 5-20)
(Ground Fault Circuit Interrupter)
Screw terminals


Each socket can be loaded with 20 A, however, the total load of both sockets must be below 30 A.

Link a termékhez

Ábrák



Szimbolikus ábra

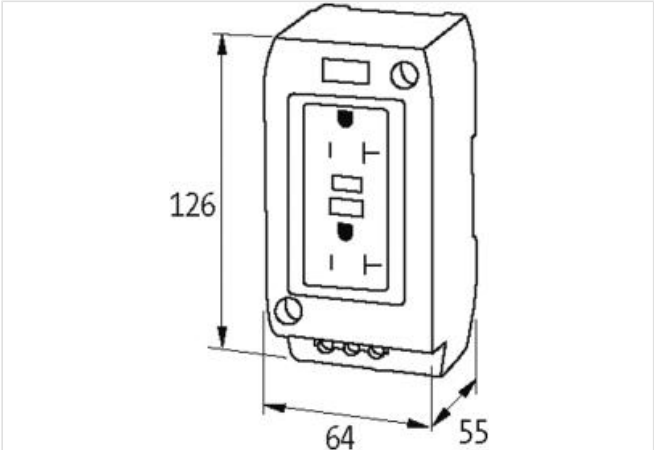

Commercial data	
ECLASS-6.0	27189217
ECLASS-6.1	27142305
ECLASS-7.0	27142305
ECLASS-8.0	27142305
ECLASS-9.0	27142305
ECLASS-10.1	27142305
ECLASS-11.1	27142305
ECLASS-12.0	27142305
ETIM-5.0	EC000020
customs tariff number	85366990
GTIN	4048879041386
Packaging unit	1
Electrical data	
Fault current min.	4 mA
Fault current max.	6 mA
Electrical data Supply	
Operating voltage AC	125 V
Operating current max.	20 A
Installation	
Connection cross section max.	6 mm²

Installation | Connection

Connection	Screw terminals SK
------------	--------------------

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	126 mm
Width	64 mm
Depth	55 mm