


MODLINK MSDD DBL COMBI INSERT GERMANY

1xRJ45+USB-A + RCD opening

- 1× Germany (VDE) white
- 1× USB 3.0 (female/female) form A
- 1× RJ45, 8-pole metal, CAT5e (female/female)
- 1× FI cut-out

Link a termékhez

Ábrák

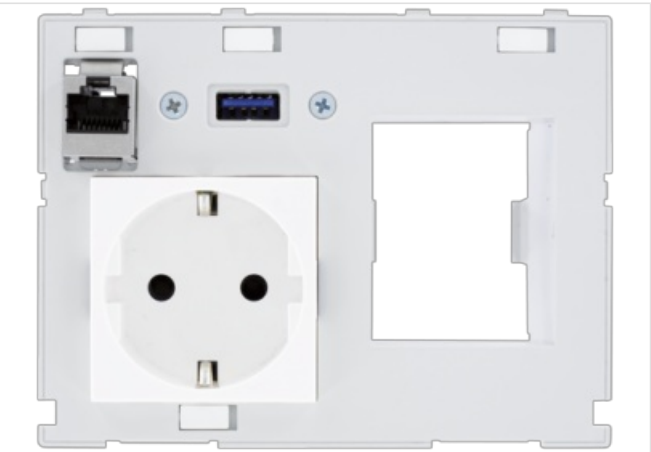

Szimbolikus ábra



| Commercial data                          |               |
|------------------------------------------|---------------|
| ECLASS-6.0                               | 27189217      |
| ECLASS-6.1                               | 27189217      |
| ECLASS-7.0                               | 27189217      |
| ECLASS-8.0                               | 27189217      |
| ECLASS-9.0                               | 27182806      |
| ECLASS-10.1                              | 27182806      |
| ECLASS-11.1                              | 27182806      |
| ECLASS-12.0                              | 27182806      |
| ETIM-5.0                                 | EC002625      |
| customs tariff number                    | 85366990      |
| GTIN                                     | 4048879401869 |
| Packaging unit                           | 1             |
| Mechanical data   Mounting data          |               |
| Height                                   | 88 mm         |
| Width                                    | 116 mm        |
| Depth                                    | 70 mm         |
| Environmental characteristics   Climatic |               |
| Storage temperature min.                 | 5 °C          |
| Storage temperature max.                 | 40 °C         |
| Germany (VDE)                            |               |

|                               |                           |
|-------------------------------|---------------------------|
| Connection cross section max. | 2,5 mm <sup>2</sup>       |
| AWG number max.               | 14                        |
| Operating voltage AC          | 250 V                     |
| Operating current             | 16 A                      |
| Connection                    | Spring clamp terminals FK |
| No. of poles                  | 2 + PE                    |
| Connections per pole          | 2                         |
| Protection contact present    | yes                       |

**USB**

|                                       |                   |
|---------------------------------------|-------------------|
| Operating voltage AC                  | 48 V              |
| Operating voltage DC                  | 48 V              |
| Operating voltage AC max. (UL-listed) | 30 V              |
| Operating voltage DC max. (UL-listed) | 42,4 V            |
| Operating current                     | 1,5 A             |
| USB specification                     | 3.0               |
| Data transmission rate max.           | 5000 MBit/s       |
| Looking techniques                    | Snap-in connector |

**RJ45**

|                                       |                   |
|---------------------------------------|-------------------|
| Operating voltage AC max. (UL-listed) | 30 V              |
| Operating voltage DC max. (UL-listed) | 42,4 V            |
| Current operating max. (UL)           | 175 mA            |
| Family construction form              | RJ45              |
| Family type Back side                 | RJ45              |
| Cable category min.                   | Cat5e             |
| Looking techniques                    | Snap-in connector |