


Modlink MSDD set contains: Frame 4000-68522-0000003

Insert 4000-68000-0150000 + 4000-68000-0940000

[Link a termékhez](#)

Ábrák

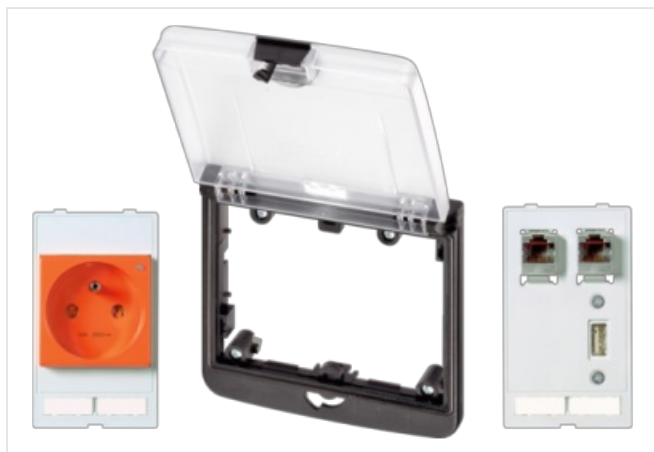

Szimbolikus ábra



Commercial data

ECLASS-6.1	27189217
ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27189217
ECLASS-10.1	27182806
ECLASS-11.1	27182806
ECLASS-12.0	27182806
customs tariff number	85366990

GTIN	4048879841368
------	---------------

Packaging unit	1
----------------	---

Frame

Degree of protection (EN IEC 60529)	IP65
-------------------------------------	------

Operating temperature min.	-30 °C
----------------------------	--------

Operating temperature max.	70 °C
----------------------------	-------

Storage temperature min.	-30 °C
--------------------------	--------

Storage temperature max.	80 °C
--------------------------	-------

Suitable for installation wall thickness min.	1 mm
---	------

Suitable for installation wall thickness max.	5 mm
---	------

Color cover	transparent
-------------	-------------

Color housing	black
---------------	-------

Material lid	PC
--------------	----

Material housing	PA
------------------	----

Shielding plate

Connection information	Threaded hole M4
------------------------	------------------

Tightening torque	0,9 Nm
-------------------	--------

France (UTE-NF)

Connection cross section max.	2,5 mm ²
-------------------------------	---------------------

AWG number max.	14
-----------------	----

Operating voltage AC	250 V
----------------------	-------

Operating current min.	10 A
------------------------	------

Operating current max.	16 A
------------------------	------

Connection	Spring clamp terminals FK
------------	---------------------------

No. of poles	2 + PE
--------------	--------

Connections per pole	2
----------------------	---

Protection contact present	yes
----------------------------	-----

USB

Operating voltage AC	48 V
----------------------	------

Operating voltage DC	48 V
----------------------	------

Operating voltage AC max. (UL-listed)	30 V
---------------------------------------	------

Operating voltage DC max. (UL-listed)	42,4 V
---------------------------------------	--------

Operating current	1,5 A
-------------------	-------

USB specification	3.0
-------------------	-----

Data transmission rate max.	5000 MBit/s
-----------------------------	-------------

Looking techniques	Snap-in connector
--------------------	-------------------

RJ45

Operating voltage AC max. (UL-listed)	30 V
---------------------------------------	------

Operating voltage DC max. (UL-listed)	42,4 V
---------------------------------------	--------

Current operating max. (UL)	175 mA
-----------------------------	--------

Family construction form	RJ45
--------------------------	------

Family type Back side	RJ45
-----------------------	------

Cable category min.	Cat5e
---------------------	-------

Looking techniques	Snap-in connector
--------------------	-------------------