


**Modlink MSDD-set: Frame 4000-68522-0000001,**

insert 4000-68000-4300000

### [Link a termékhez](#)

#### Ábrák

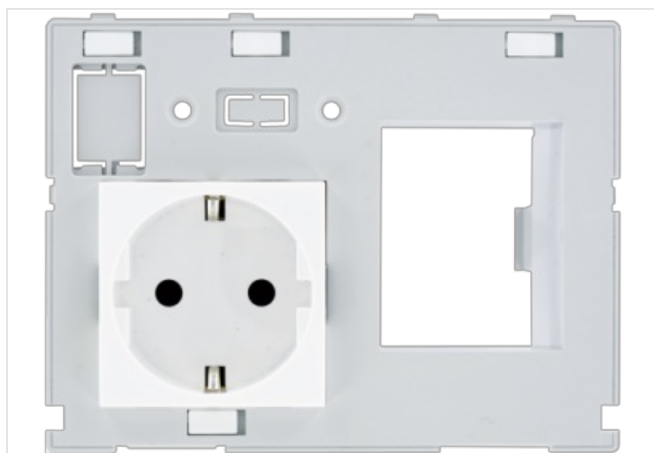

Szimbolikus ábra



#### Commercial data

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27189217 |
| ECLASS-6.1  | 27189217 |
| ECLASS-7.0  | 27189217 |
| ECLASS-8.0  | 27189217 |
| ECLASS-9.0  | 27189217 |
| ECLASS-10.1 | 27182806 |
| ECLASS-11.1 | 27182806 |
| ECLASS-12.0 | 27182806 |

|                                               |                           |
|-----------------------------------------------|---------------------------|
| ETIM-5.0                                      | EC002625                  |
| customs tariff number                         | 85366990                  |
| GTIN                                          | 4048879613224             |
| Packaging unit                                | 1                         |
| <b>Frame</b>                                  |                           |
| Degree of protection (EN IEC 60529)           | IP65                      |
| Operating temperature min.                    | -30 °C                    |
| Operating temperature max.                    | 70 °C                     |
| Storage temperature min.                      | -30 °C                    |
| Storage temperature max.                      | 80 °C                     |
| Suitable for installation wall thickness min. | 1 mm                      |
| Suitable for installation wall thickness max. | 5 mm                      |
| Color cover                                   | transparent               |
| Color housing                                 | black                     |
| Material lid                                  | PC                        |
| Material housing                              | PA                        |
| <b>Shielding plate</b>                        |                           |
| Connection information                        | Threaded hole M4          |
| Tightening torque                             | 0,9 Nm                    |
| <b>Germany (VDE)</b>                          |                           |
| Connection cross section max.                 | 2,5 mm <sup>2</sup>       |
| AWG number max.                               | 14                        |
| Operating voltage AC                          | 250 V                     |
| Operating current                             | 16 A                      |
| Connection                                    | Spring clamp terminals FK |
| No. of poles                                  | 2 + PE                    |
| Connections per pole                          | 2                         |
| Protection contact present                    | yes                       |