

MODLINK MPV CONTROL CABINET COUPLING

MPV Frame


Double  
for standard cut-out  
Size 24 (35×112 mm)  
IP65

[Link a termékhez](#)

Ábrák



Szimbolikus ábra

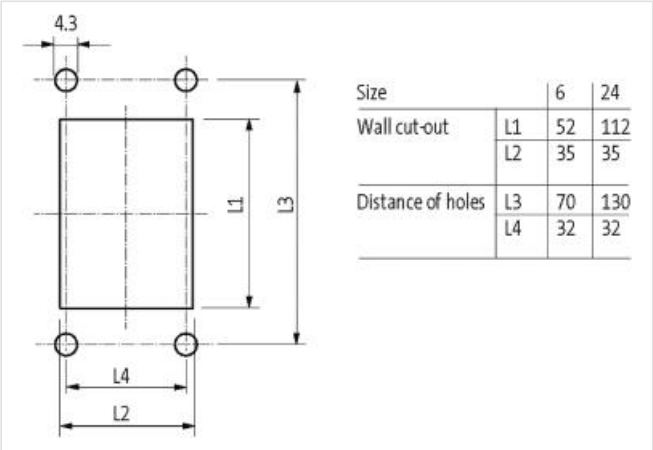

Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27189217      |
| ECLASS-6.1            | 27189217      |
| ECLASS-7.0            | 27189217      |
| ECLASS-8.0            | 27189217      |
| ECLASS-9.0            | 27189217      |
| ECLASS-10.1           | 27182806      |
| ECLASS-11.1           | 27182806      |
| ECLASS-12.0           | 27182806      |
| ETIM-5.0              | EC002625      |
| customs tariff number | 39269097      |
| GTIN                  | 4048879032209 |
| Packaging unit        | 1             |

Device protection | Electrical

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP65 |
|-------------------------------------|------|

Mechanical data | Material data

|                  |     |
|------------------|-----|
| Material housing | PBT |
|------------------|-----|

Mechanical data | Mounting data

|        |         |
|--------|---------|
| Height | 146 mm  |
| Width  | 58 mm   |
| Depth  | 13,5 mm |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 80 °C  |