

**SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE**

24V LED+Z-Diode M16x1.5

Form B (10 mm)

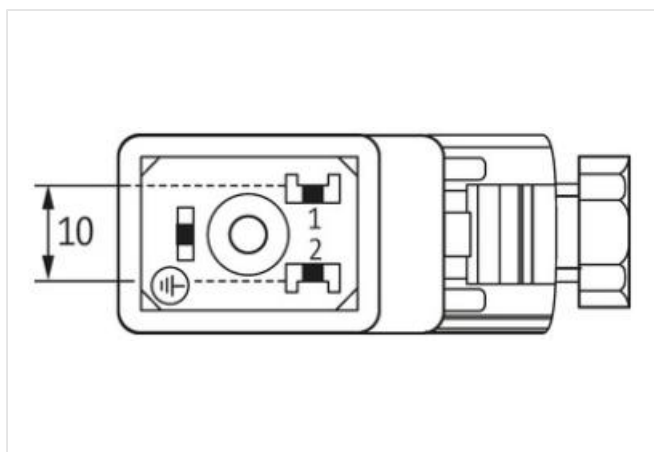
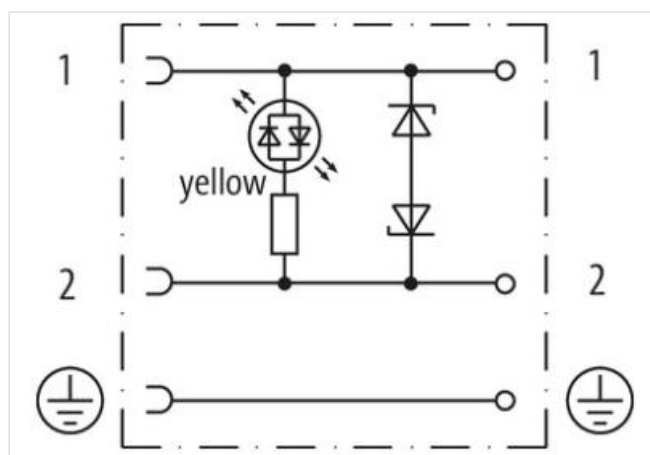
24 V AC  $\pm 20\%$  / DC  $\pm 25\%$ 

LED and Z-diode

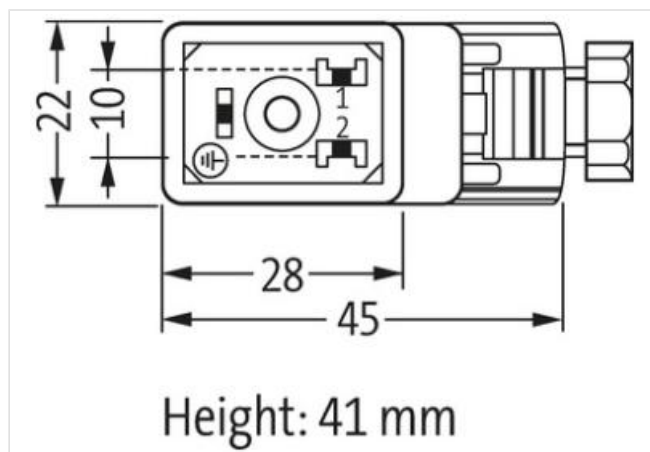
metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link a termékhez](#)**Ábrák**

Szimbolikus ábra

**Side 1**

Degree of protection (EN IEC 60529)

IP65

**Commercial data**

ECLASS-6.0

27279221

|                       |               |
|-----------------------|---------------|
| ECLASS-7.0            | 27440104      |
| ECLASS-8.0            | 27440104      |
| ECLASS-9.0            | 27440102      |
| ECLASS-10.1           | 27440105      |
| ECLASS-11.1           | 27440105      |
| ECLASS-12.0           | 27440105      |
| ETIM-5.0              | EC002062      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879187350 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                                    |        |
|------------------------------------|--------|
| Operating voltage AC               | 24 V   |
| Operating voltage AC min.          | 19,2 V |
| Operating voltage AC max.          | 28,8 V |
| Operating voltage DC               | 24 V   |
| Operating voltage DC min.          | 18 V   |
| Operating voltage DC max.          | 30 V   |
| Current operating per contact max. | 4 A    |

**Installation | Connection**

|                   |        |
|-------------------|--------|
| Tightening torque | 0,4 Nm |
| Mounting set      | M3     |

**Installation | Pin assignment**

|              |        |
|--------------|--------|
| No. of poles | 2 + PE |
|--------------|--------|

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
|----------------------------------------|-------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |