

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

230V LED+VDR PG9

Form B (10 mm)

230 V AC/DC $\pm 10\%$

LED and VDR



PG9

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link a termékhez](#)

Ábrák

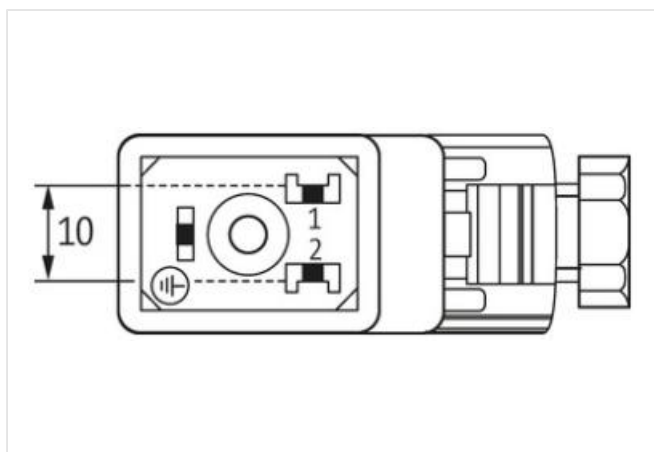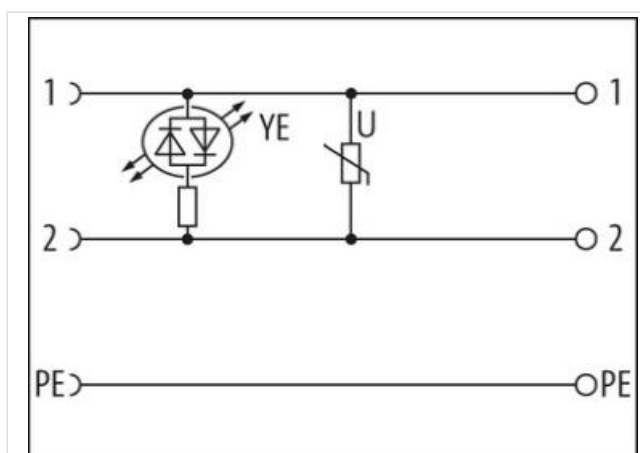

Szimbolikus ábra

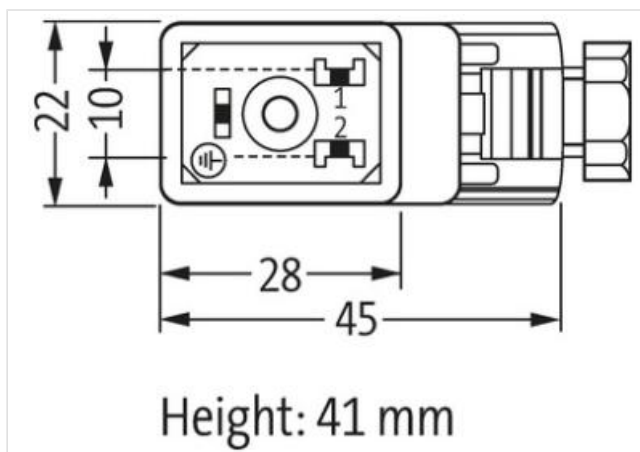

Side 1

Degree of protection (EN IEC 60529)

IP65

Commercial data

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
customs tariff number	85366990

GTIN 4048879187251

Packaging unit 1

Electrical data

Capacity CX 15 ms

Holding power max. 100 W

Electrical data | Supply

Operating voltage AC 230 V

Operating voltage AC min. 207 V

Operating voltage AC max. 253 V

Operating voltage DC 230 V

Operating voltage DC min. 207 V

Operating voltage DC max. 253 V

Cut-off peak voltage max. 450 V

Current operating per contact max. 1 A

Current consumption max. 12 mA

Diagnostics

Status indication LED yellow

InstallationConnection cross section max. 1,5 mm²**Installation | Connection**

Tightening torque 0,4 Nm

Mounting set M3

Device protection | Electrical

Additional condition protection degree inserted, locked, with screw connection

Mechanical data | Mounting data

Mounting method PG9

Clamping range min. 6 mm

Clamping range max. 8 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C