

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE



0...230V M16x1.5

Form B (10 mm)
max. 230 V AC/DC
without components
metric


Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link a termékhez](#)

Ábrák

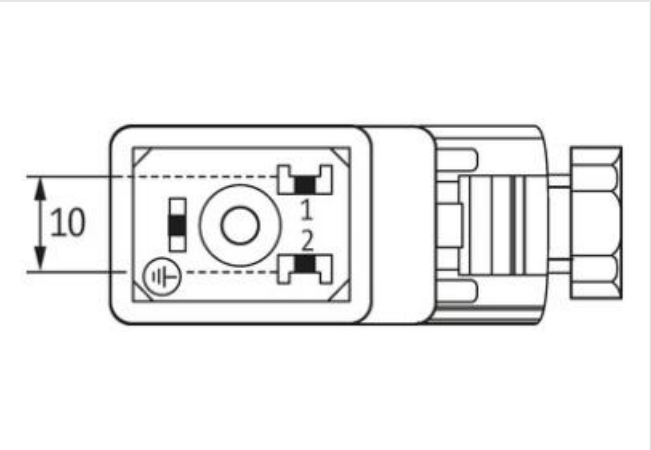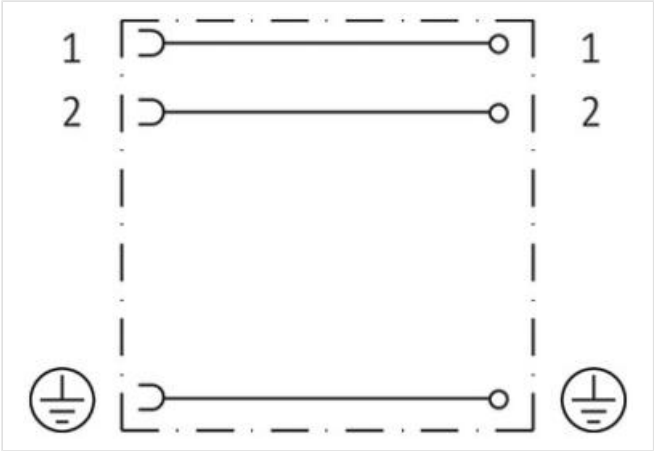

Szimbolikus ábra

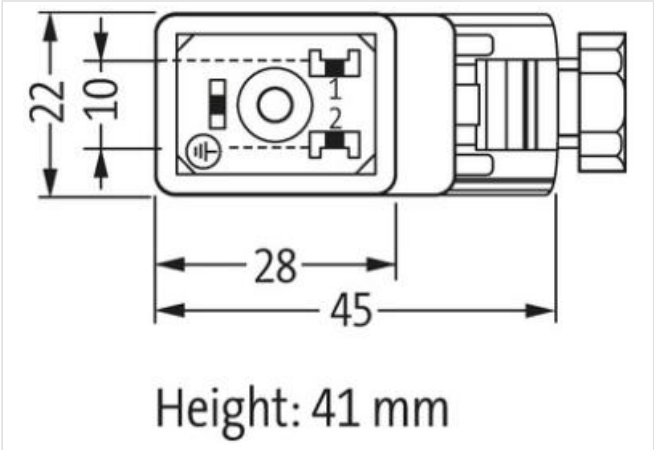

Side 1

Degree of protection (EN IEC 60529) IP65

Commercial data

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
customs tariff number	85366990

GTIN 4048879187220

Packaging unit 1

Electrical data | Supply

Operating voltage AC max. 230 V

Operating voltage DC max. 230 V

Current operating per contact max. 10 A

InstallationConnection cross section max. 1,5 mm²**Installation | Connection**

Tightening torque 0,4 Nm

Mounting set M16 x 1.5

Device protection | Electrical

Additional condition protection degree inserted, locked, with screw connection

Mechanical data | Mounting data

fastening screw M3

Clamping range min. 5 mm

Clamping range max. 10 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C