




SVS VALVE PLUG FORM BI 11MM FIELD-WIREABLE

110V LED+VDR M16x1.5

Form BI (11 mm)
110 V AC/DC $\pm 10\%$
LED and VDR
metric
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link a termékhez

Ábrák

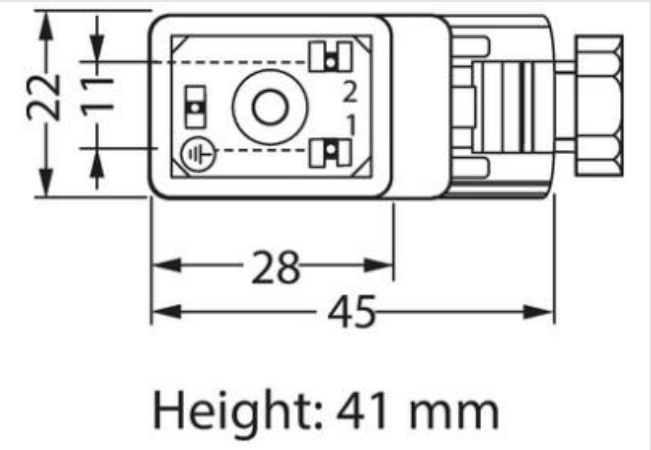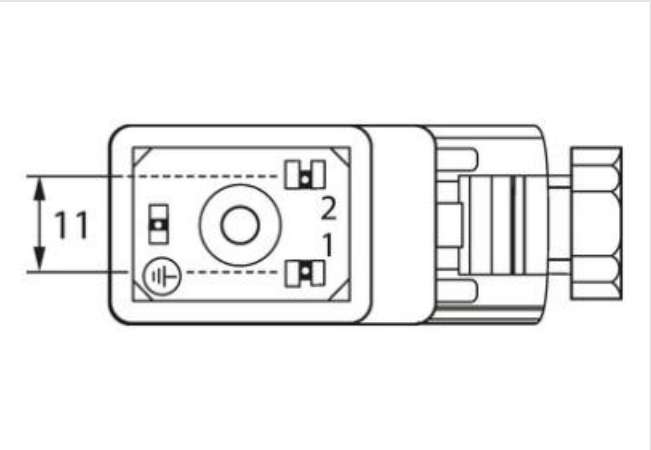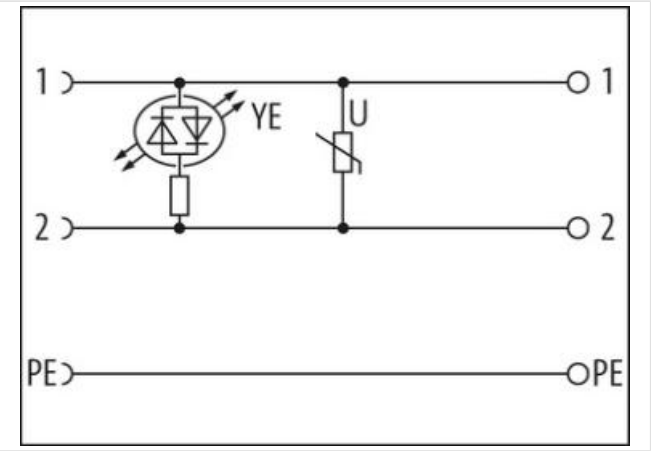

Szimbolikus ábra

Side 1	
Degree of protection (EN IEC 60529)	IP65
Commercial data	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
customs tariff number	85366990

GTIN 4048879187138

Packaging unit 1

Electrical data

Capacity CX 10 ms

Holding power max. 100 W

Electrical data | Supply

Operating voltage AC 110 V

Operating voltage AC min. 99 V

Operating voltage AC max. 121 V

Operating voltage DC 110 V

Operating voltage DC min. 99 V

Operating voltage DC max. 121 V

Cut-off peak voltage max. 250 V

Current consumption max. 12 mA

Diagnostics

Status indication LED yellow

InstallationConnection cross section max. 1,5 mm²**Installation | Connection**

Tightening torque 0,4 Nm

Mounting set M16 x 1.5

Device protection | Electrical

Additional condition protection degree inserted, locked, with screw connection

Mechanical data | Mounting data

fastening screw M3

Clamping range min. 5 mm

Clamping range max. 10 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C