

**Valve plug MJC 0° with cable LED**




PUR 2x0.75 bk 1.5m

Female straight  
10...30 V AC/DC  
LED

Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.  
Further cable lengths on request.

[Link a termékhez](#)

Ábrák

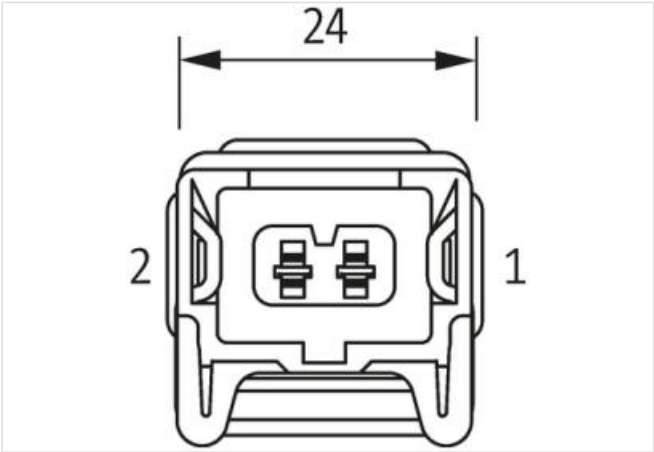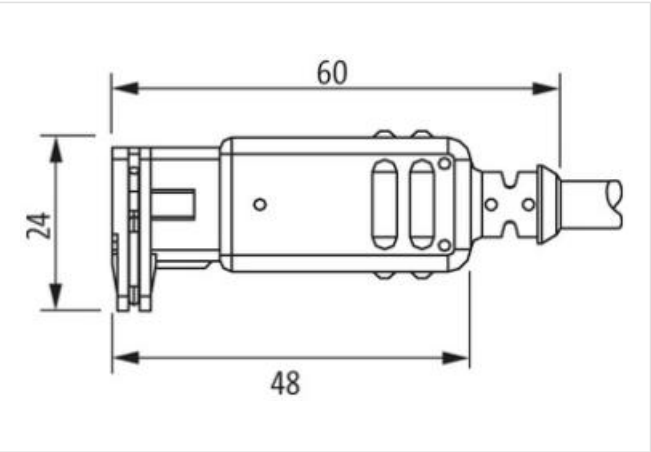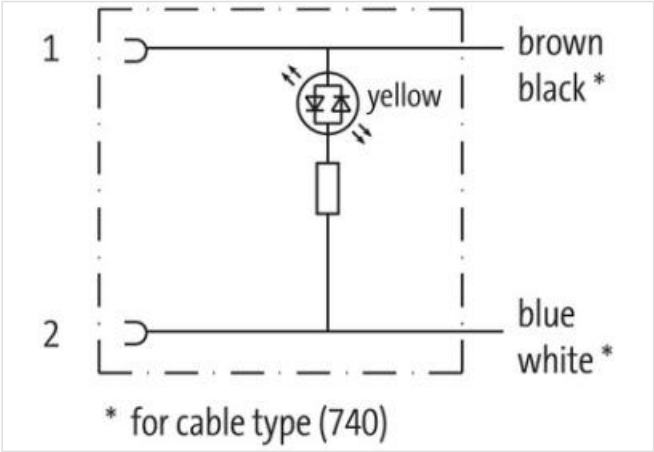

Szimbolikus ábra

Cable length 1,5 m

**Commercial data**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27279218 |
| ECLASS-6.1  | 27279218 |
| ECLASS-7.0  | 27279218 |
| ECLASS-8.0  | 27279218 |
| ECLASS-9.0  | 27060312 |
| ECLASS-10.1 | 27060312 |

|                                          |                                                                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| ECLASS-11.1                              | 27060312                                                                                                                                              |
| ECLASS-12.0                              | 27060312                                                                                                                                              |
| ETIM-5.0                                 | EC001855                                                                                                                                              |
| customs tariff number                    | 85444290                                                                                                                                              |
| GTIN                                     | 4048879135580                                                                                                                                         |
| Packaging unit                           | 1                                                                                                                                                     |
| Electrical data   Supply                 |                                                                                                                                                       |
| Operating voltage AC min.                | 10 V                                                                                                                                                  |
| Operating voltage AC max.                | 30 V                                                                                                                                                  |
| Operating voltage DC min.                | 10 V                                                                                                                                                  |
| Operating voltage DC max.                | 30 V                                                                                                                                                  |
| Current operating per contact max.       | 4 A                                                                                                                                                   |
| Current consumption max.                 | 12 mA                                                                                                                                                 |
| Diagnostics                              |                                                                                                                                                       |
| Status indication LED                    | yellow                                                                                                                                                |
| Device protection   Electrical           |                                                                                                                                                       |
| Degree of protection (EN IEC 60529)      | IP65                                                                                                                                                  |
| Additional condition protection degree   | inserted, locked                                                                                                                                      |
| Rated surge voltage                      | 0,8 kV                                                                                                                                                |
| Device protection   Media                |                                                                                                                                                       |
| Flame resistance                         | flame retardant                                                                                                                                       |
| Mechanical data   Material data          |                                                                                                                                                       |
| Color housing                            | black                                                                                                                                                 |
| Material housing                         | Plastic                                                                                                                                               |
| Environmental characteristics   Climatic |                                                                                                                                                       |
| Operating temperature min.               | -25 °C                                                                                                                                                |
| Operating temperature max.               | 85 °C                                                                                                                                                 |
| Additional condition temperature range   | depending on cable quality                                                                                                                            |
| Important installation notes             |                                                                                                                                                       |
| Note on strain relief                    | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                   | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
| Installation   Cable                     |                                                                                                                                                       |
| Cable identification                     | 750                                                                                                                                                   |
| Jacket Color                             | black                                                                                                                                                 |
| Amount stranding                         | 1                                                                                                                                                     |
| Stranding                                | 2 wires twisted                                                                                                                                       |
| Stranding factor min.                    | 75 mm                                                                                                                                                 |
| Stranding factor max.                    | 75 mm                                                                                                                                                 |
| wire arrangement                         | brown, blue                                                                                                                                           |
| Cable weight                             | 48,4 g/m                                                                                                                                              |
| Material jacket                          | PUR                                                                                                                                                   |
| Shore hardness jacket                    | 85 Shore A                                                                                                                                            |
| Freedom from ingredients (jacket)        | lead-free, CFC-free                                                                                                                                   |
| Outer-diameter (jacket)                  | 5,9 mm                                                                                                                                                |
| Tolerance outer diameter (sheath)        | ± 5 %                                                                                                                                                 |
| Material inner jacket                    | PVC                                                                                                                                                   |
| Color (inner jacket)                     | gray                                                                                                                                                  |
| Material wire insulation                 | PVC                                                                                                                                                   |
| Amount wires                             | 2                                                                                                                                                     |
| Outer diameter insulation                | 2 mm                                                                                                                                                  |

|                                                         |                                                      |
|---------------------------------------------------------|------------------------------------------------------|
| Outer diameter tolerance core insulation                | ± 5 %                                                |
| Shore hardness wire insulation                          | 92 Shore A                                           |
| Ingredient freeness wire insulation                     | lead-free, CFC-free                                  |
| Amount strands (wire)                                   | 24                                                   |
| Diameter of single wires                                | 0,2 mm                                               |
| Conductor crosssection (wire)                           | 0,75 mm <sup>2</sup>                                 |
| Material conductor wire                                 | Stranded copper wire, bare                           |
| Conductor type (wire)                                   | Strand class 5                                       |
| Current load capacity (standard)                        | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                         | 12 A                                                 |
| Electrical resistance line constant wire                | 26 Ω/km @ 20 °C                                      |
| Nominal voltage power AC max.                           | 300 V                                                |
| Power frequency withstand voltage power (wire - jacket) | 2 kV @ 60 s                                          |
| AC withstand voltage power (wire - wire)                | 2 kV @ 60 s                                          |
| Min. operating temperature (static)                     | -40 °C                                               |
| Max. operating temperature (fixed)                      | 80 °C                                                |
| Operating temperature min. (dynamic)                    | -5 °C                                                |
| Operating temperature max. (dynamic)                    | 80 °C                                                |
| UV resistance                                           | DIN EN ISO 4892-2 A                                  |
| Flame resistance                                        | UL 1581 § 1100 FT2   IEC 60332-2-2   UL 1581 § 1090  |
| chemical resistance                                     | Good, application-related testing                    |
| Gasoline resistance                                     | Good, application-related testing                    |
| Oil resistance                                          | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (dynamic)                                | 15 x Outer diameter                                  |