

H-Coupler M12 Power male S-cod. / 3x female S-cod.

4-pol.

Power

H coupler M12 male S-coded/ 3x M12 female S-coded



4-pole

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Link a termékhez

Ábrák

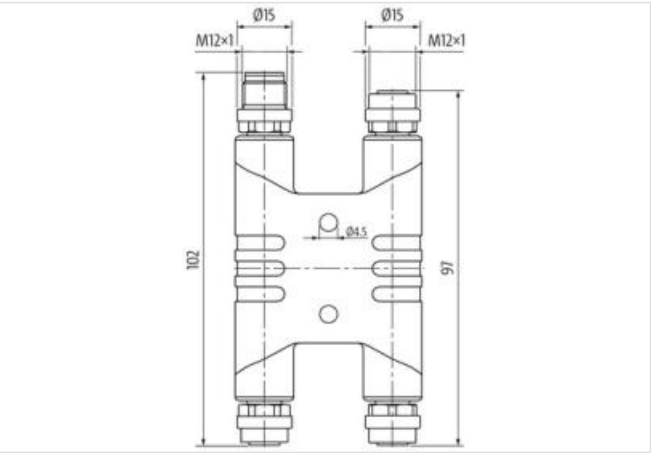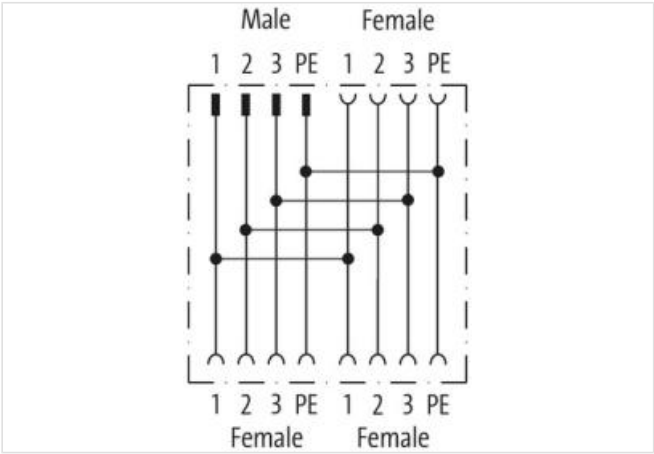

Szimbolikus ábra

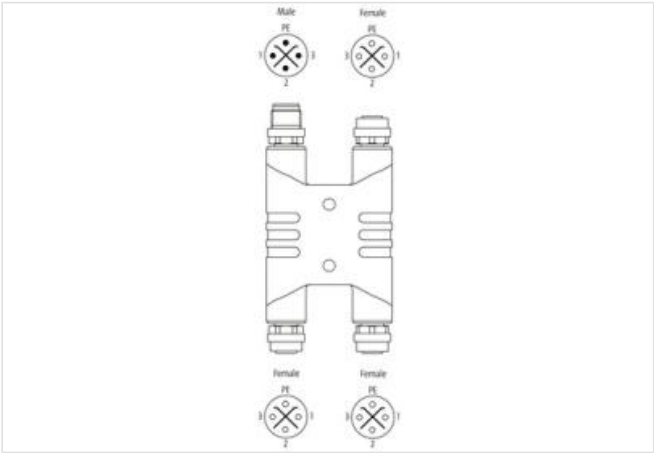

Side 1	
Coating contact	gold plated
Family construction form	M12P
Coding	S
Material contact	Brass
No. of poles	4

Degree of protection (EN IEC 60529) IP65, IP67, IP68

Side 2

Coating contact	gold plated
Family construction form	M12P
Coding	S
Material contact	Brass
No. of poles	4
Degree of protection (EN IEC 60529)	IP65, IP67, IP68

Side 3

Coating contact	gold plated
Family construction form	M12P
Coding	S
Material contact	Brass
No. of poles	4
Degree of protection (EN IEC 60529)	IP65, IP67, IP68

Side 4

Family construction form	M12P
Coding	S
No. of poles	4

Commercial data

ECLASS-6.0	27279220
ECLASS-7.0	27440103
ECLASS-8.0	27440103
ECLASS-9.0	27440103
ECLASS-10.1	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ETIM-5.0	EC002061
customs tariff number	85366990
GTIN	4048879840095
Packaging unit	1

Electrical data | Supply

Operating voltage AC max.	630 V
Operating voltage AC max. (UL-listed)	600 V
Current operating per contact max.	12 A

Diagnostics

Status indication LED	no
-----------------------	----

Installation | Connection

Tightening torque	0,6 Nm
Mounting set	M12 x 1

Device protection | Electrical

Pollution Degree	2
------------------	---

Mechanical data | Material data

Material contact carrier	PA
--------------------------	----

Mechanical data | Mounting data

Mounting method	inserted, screwed, Shaking protection
-----------------	---------------------------------------

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
Operating temperature max.	90 °C

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.

Conformity

Product standard	IEC 61076-2-111
------------------	-----------------