

B24 Surface mounted h., IP68

Screw locking, side entry M50


B24
Surface mounted housing
Protection IP68
Screw locking
Technical data will be only guaranteed with Murrelektronik components.

Link a termékhez

Ábrák



Szimbolikus ábra

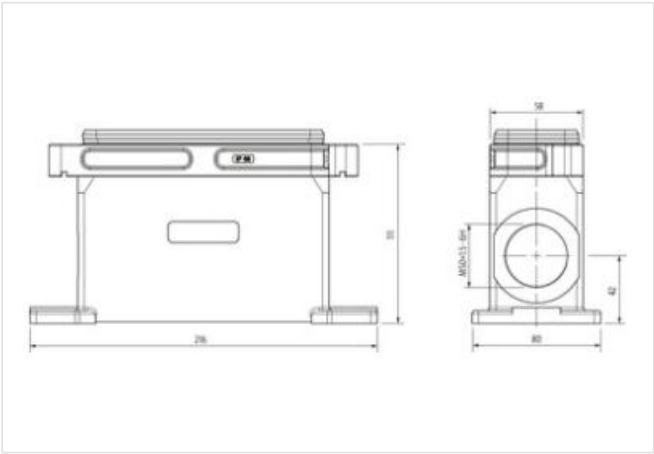

Commercial data

ECLASS-6.0	27143424
ECLASS-7.0	27440209
ECLASS-8.0	27440209
ECLASS-9.0	27440209
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
customs tariff number	85389099
GTIN	4065909051610
Packaging unit	1

Installation

Cable outlet laterally

Installation | Connection

Mounting set	M50
Mating cycles min.	500

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP68
Additional condition protection degree	inserted, locked, with screw connection

Mechanical data

Housing type Surface mounted housing

Mechanical data | Material data

Coating housing powder-coated

Material gasket	Silicon
Material housing	Aluminum die casting
Locking material	Stainless steel

Mechanical data | Mounting data

Size	B24
Mounting method	Screw locking
Height	111 mm
Width	80 mm
Depth	216 mm

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	125 °C
Climatic category (EN IEC 60068-1)	40/125/21