


A10 Hood, low profile, IP65

Single locking lever, top entry M20

A10  
Hood (low)  
Single locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Link a termékhez

Ábrák

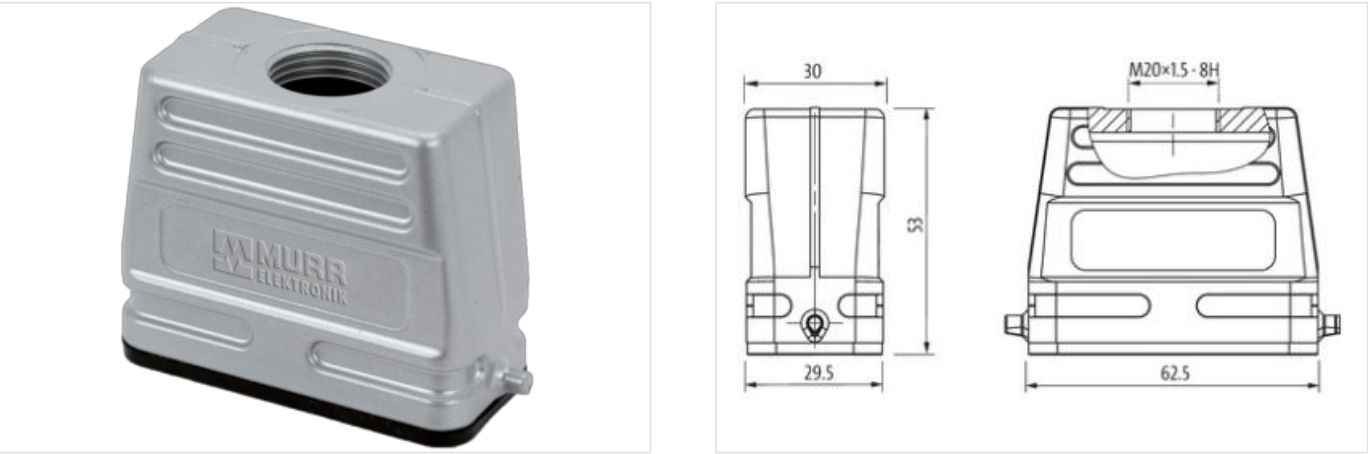

Szimbolikus ábra

| Commercial data                        |                                         |
|----------------------------------------|-----------------------------------------|
| ECLASS-6.0                             | 27279221                                |
| ECLASS-6.1                             | 27261203                                |
| ECLASS-7.0                             | 27440202                                |
| ECLASS-8.0                             | 27440202                                |
| ECLASS-9.0                             | 27440202                                |
| ECLASS-10.1                            | 27440202                                |
| ECLASS-11.1                            | 27440202                                |
| ECLASS-12.0                            | 27440202                                |
| ETIM-5.0                               | EC000437                                |
| customs tariff number                  | 85389099                                |
| GTIN                                   | 4048879696364                           |
| Packaging unit                         | 1                                       |
| Installation                           |                                         |
| Cable outlet                           | straight                                |
| Installation   Connection              |                                         |
| Mounting set                           | M20                                     |
| Mating cycles min.                     | 500                                     |
| Device protection   Electrical         |                                         |
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |
| Mechanical data                        |                                         |
| Housing type                           | Hood                                    |
| Mechanical data   Material data        |                                         |

|                  |                      |
|------------------|----------------------|
| Coating housing  | powder-coated        |
| Coating locking  | verzinkt             |
| Material gasket  | CR                   |
| Material housing | Aluminum die casting |
| Locking material | Steel                |

**Mechanical data | Mounting data**

|                    |                      |
|--------------------|----------------------|
| Size               | A10                  |
| Height             | 53 mm                |
| Width              | 30 mm                |
| Depth              | 62,5 mm              |
| Looking techniques | Single locking lever |

**Environmental characteristics | Climatic**

|                                    |           |
|------------------------------------|-----------|
| Operating temperature min.         | -40 °C    |
| Operating temperature max.         | 100 °C    |
| Climatic category (EN IEC 60068-1) | 40/100/21 |