


A10 Hood, low profile, IP65

Single locking lever, side entry M25

A10  
Hood (low)  
Single locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Link a termékhez

Ábrák

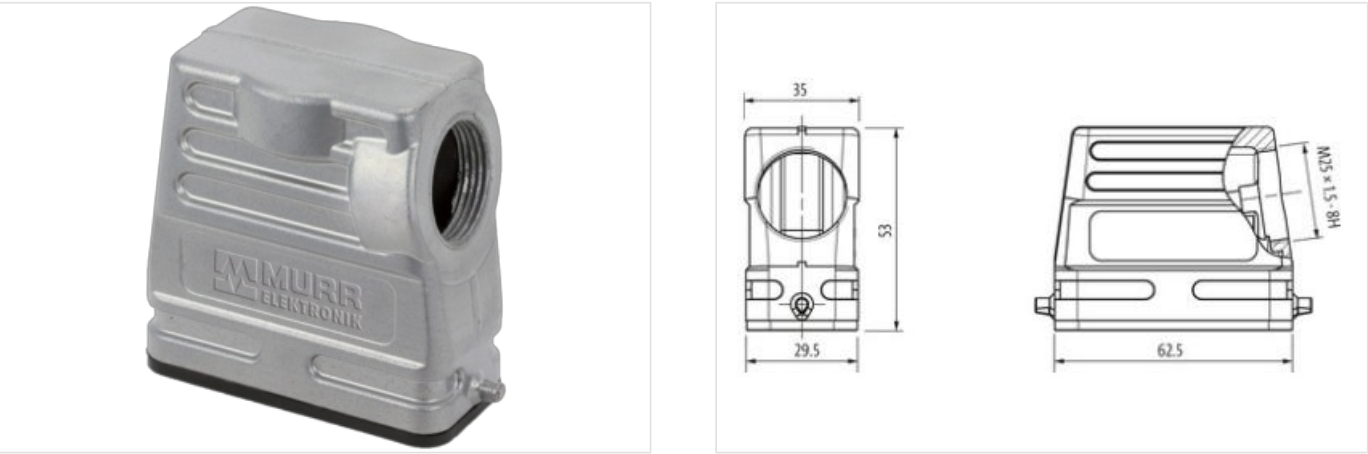

Szimbolikus ábra

| Commercial data                        |                                         |
|----------------------------------------|-----------------------------------------|
| ECLASS-6.0                             | 27143424                                |
| ECLASS-6.1                             | 27261203                                |
| ECLASS-7.0                             | 27440202                                |
| ECLASS-8.0                             | 27440202                                |
| ECLASS-9.0                             | 27440202                                |
| ECLASS-10.1                            | 27440202                                |
| ECLASS-11.1                            | 27440202                                |
| ECLASS-12.0                            | 27440202                                |
| ETIM-5.0                               | EC000437                                |
| customs tariff number                  | 85389099                                |
| GTIN                                   | 4048879643559                           |
| Packaging unit                         | 1                                       |
| Installation                           |                                         |
| Cable outlet                           | laterally                               |
| Installation   Connection              |                                         |
| Mounting set                           | M25                                     |
| Mating cycles min.                     | 500                                     |
| Device protection   Electrical         |                                         |
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |
| Mechanical data                        |                                         |
| Housing type                           | Hood                                    |
| Mechanical data   Material data        |                                         |

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |          |
|-----------------|----------|
| Coating locking | verzinkt |
|-----------------|----------|

|                 |    |
|-----------------|----|
| Material gasket | CR |
|-----------------|----|

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | A10 |
|------|-----|

|        |       |
|--------|-------|
| Height | 53 mm |
|--------|-------|

|       |       |
|-------|-------|
| Width | 30 mm |
|-------|-------|

|       |         |
|-------|---------|
| Depth | 62,5 mm |
|-------|---------|

|                    |                      |
|--------------------|----------------------|
| Looking techniques | Single locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|