

**MVP-METALL, 8XM12, 5POLE, PRE-WIRED CABLE**

10.0m PUR 16x0,34+5X0.75, UL/CSA

8-way, 5-pole

10.0 m

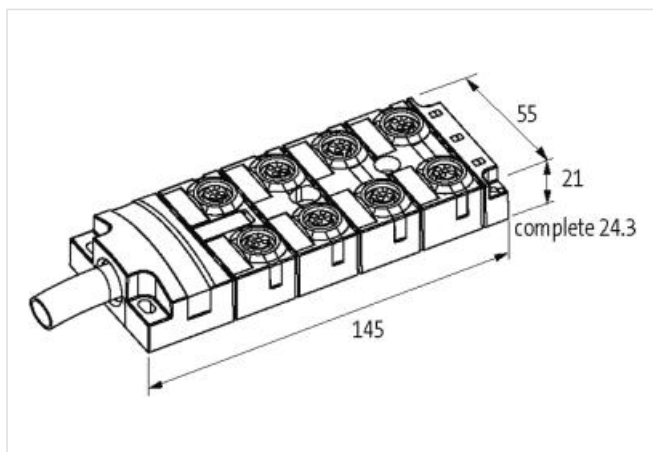
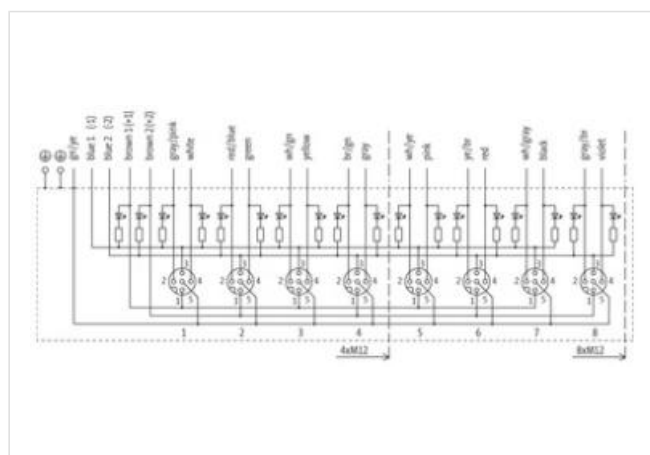
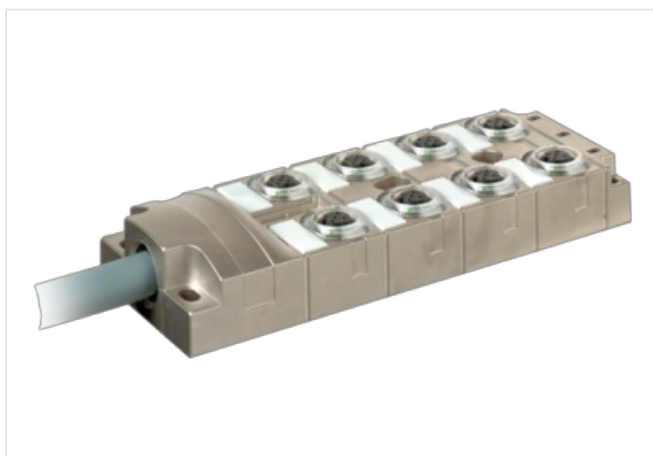
potentially separated

Replaces identical product (Art.No. 27523)

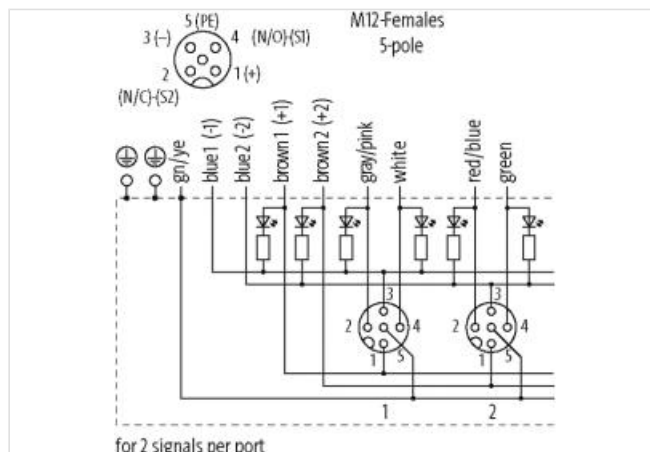
with LED for digital PNP-signals 24 V DC

Separate protection of ports 1, 3, 5, 7 or 2, 4, 6, 8 possible.

Further cable lengths on request.

**[Link a termékhez](#)****Ábrák**

Szimbolikus ábra

**Commercial data**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27279219 |
| ECLASS-6.1 | 27279219 |
| ECLASS-7.0 | 27279219 |

|                                          |                                                                                                                                                                                                           |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ECLASS-8.0                               | 27279219                                                                                                                                                                                                  |
| ECLASS-9.0                               | 27440108                                                                                                                                                                                                  |
| ECLASS-10.1                              | 27440108                                                                                                                                                                                                  |
| ECLASS-11.1                              | 27440108                                                                                                                                                                                                  |
| ECLASS-12.0                              | 27440108                                                                                                                                                                                                  |
| ETIM-5.0                                 | EC002585                                                                                                                                                                                                  |
| customs tariff number                    | 85444290                                                                                                                                                                                                  |
| GTIN                                     | 4048879352598                                                                                                                                                                                             |
| Packaging unit                           | 1                                                                                                                                                                                                         |
| Electrical data   Supply                 |                                                                                                                                                                                                           |
| Operating voltage DC                     | 24 V                                                                                                                                                                                                      |
| Current operating per contact max.       | 4 A                                                                                                                                                                                                       |
| Installation   Connection                |                                                                                                                                                                                                           |
| Mounting set                             | M12 x 1                                                                                                                                                                                                   |
| Device protection   Electrical           |                                                                                                                                                                                                           |
| Degree of protection (EN IEC 60529)      | IP65, IP67, IP68                                                                                                                                                                                          |
| Mechanical data   Material data          |                                                                                                                                                                                                           |
| Coating housing                          | Nickel                                                                                                                                                                                                    |
| Material housing                         | Zinc die-casting                                                                                                                                                                                          |
| Mechanical data   Mounting data          |                                                                                                                                                                                                           |
| Mounting method                          | Schraubgewinde                                                                                                                                                                                            |
| Environmental characteristics   Climatic |                                                                                                                                                                                                           |
| Operating temperature min.               | -25 °C                                                                                                                                                                                                    |
| Operating temperature max.               | 90 °C                                                                                                                                                                                                     |
| Additional condition temperature range   | depending on cable quality                                                                                                                                                                                |
| Installation   Cable                     |                                                                                                                                                                                                           |
| Cable identification                     | 403                                                                                                                                                                                                       |
| Printing color of wire insulation        | white (isolation blue), white (isolation brown)                                                                                                                                                           |
| Jacket Color                             | gray                                                                                                                                                                                                      |
| Type of Certificate                      | cURus                                                                                                                                                                                                     |
| Amount stranding                         | 1                                                                                                                                                                                                         |
| Stranding                                | 5 wires around Core filler twisted                                                                                                                                                                        |
| Stranding factor min.                    | 70 mm                                                                                                                                                                                                     |
| Stranding factor max.                    | 70 mm                                                                                                                                                                                                     |
| Amount stranding (type 2)                | 1                                                                                                                                                                                                         |
| Stranding (type 2)                       | 16 wires counter-rotating twisted                                                                                                                                                                         |
| Stranding factor min. (type 2)           | 105 mm                                                                                                                                                                                                    |
| Stranding factor max. (type 2)           | 105 mm                                                                                                                                                                                                    |
| Banding                                  | Fleece                                                                                                                                                                                                    |
| Filler                                   | yes                                                                                                                                                                                                       |
| wire arrangement                         | (gray-pink, violet, brown-gray, black, gray-white, red, brown-yellow, pink, yellow-white, gray, brown-green, yellow, green-white, green, red-blue, white), brown 1, blue 2, brown 2, green-yellow, blue 1 |
| Cable weight                             | 253 g/m                                                                                                                                                                                                   |
| Material jacket                          | PUR                                                                                                                                                                                                       |
| Shore hardness jacket                    | 85 ± 5 Shore A                                                                                                                                                                                            |
| Freedom from ingredients (jacket)        | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free, LABS-free                                                                                                                                 |
| Outer-diameter (jacket)                  | 11,5 mm                                                                                                                                                                                                   |
| Tolerance outer diameter (sheath)        | ± 5 %                                                                                                                                                                                                     |
| Material wire insulation                 | TPE                                                                                                                                                                                                       |
| Amount wires                             | 5                                                                                                                                                                                                         |
| Outer diameter insulation                | 1,8 mm                                                                                                                                                                                                    |
| Outer diameter tolerance core insulation | ± 5 %                                                                                                                                                                                                     |

|                                                   |                                                             |
|---------------------------------------------------|-------------------------------------------------------------|
| Shore hardness wire insulation                    | 55 ± 5 Shore D                                              |
| Ingredient freeness wire insulation               | lead-free, CFC-free, halogen-free, silicone-free, LABS-free |
| Printing color of wire insulation                 | white (isolation blue), white (isolation brown)             |
| Amount strands (wire)                             | 96                                                          |
| Diameter of single wires                          | 0,1 mm                                                      |
| Conductor crosssection (wire)                     | 0,75 mm <sup>2</sup>                                        |
| Material conductor wire                           | Stranded copper wire, bare                                  |
| Conductor type (wire)                             | strand class 6                                              |
| Material wire insulation (Data)                   | TPE                                                         |
| Outer diameter wire insulation (Data)             | 1,4 mm                                                      |
| Tolerance outer diameter wire insulation (data)   | ± 5 %                                                       |
| Shore hardness wire insulation (Data)             | 55 ± 5 Shore D                                              |
| Ingredient freeness wire insulation (Data)        | lead-free, CFC-free, halogen-free, silicone-free, LABS-free |
| Amount wires (Data)                               | 16                                                          |
| Amount strands wire (Data)                        | 42                                                          |
| Diameter of single wires (Data)                   | 0,1 mm                                                      |
| Conductor crosssection wire (Data)                | 0,34 mm <sup>2</sup>                                        |
| Material conductor wire (Data)                    | Stranded copper wire, bare                                  |
| Wire conductor type (Data)                        | strand class 6                                              |
| Max. rated voltage (conductor - conductor)        | 500 V                                                       |
| Max. rated voltage (conductor - ground)           | 300 V                                                       |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                           |
| Current load capacity min. wire                   | 9 A                                                         |
| Current load capacity min. Wire (Data)            | 4 A                                                         |
| Electrical resistance line constant wire          | 26 Ω/km @ 20 °C                                             |
| Electrical resistance coating wire (Data)         | 57 Ω/km @ 20 °C                                             |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s                                                 |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s                                                 |
| Min. operating temperature (static)               | -40 °C                                                      |
| Max. operating temperature (fixed)                | 90 °C                                                       |
| Operating temperature min. (dynamic)              | -25 °C                                                      |
| Operating temperature max. (dynamic)              | 80 °C                                                       |
| Flame resistance                                  | UL 1581 § 1100 FT2   IEC 60332-2-2   UL 1581 § 1090         |
| chemical resistance                               | Good, application-related testing                           |
| Gasoline resistance                               | Good, application-related testing                           |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404        |
| Bending radius (installation)                     | x Outer diameter                                            |
| Bending radius (fixed)                            | 5 x Outer diameter                                          |
| Bending radius (dynamic)                          | 10 x Outer diameter                                         |
| No. of bending cycles (C-track)                   | 5 Mio. @ 25 °C                                              |
| Traversing distance (C-track)                     | 1,8 m @ 25 °C                                               |
| Travel speed (C-track)                            | 2 m/s @ 25 °C                                               |

**Connection type 2**

|                          |                |
|--------------------------|----------------|
| Family construction form | free cable end |
| No. of poles             | 16             |
| Family construction form | M12            |
| Gender                   | female         |
| Color contact carrier    | black          |
| Coding                   | A              |
| No. of poles             | 5              |
| PIN 1                    | +              |
| PIN 2                    | NC S 2         |
| PIN 3                    | -              |

|       |        |
|-------|--------|
| PIN 4 | NO S 1 |
| PIN 5 | PE     |