
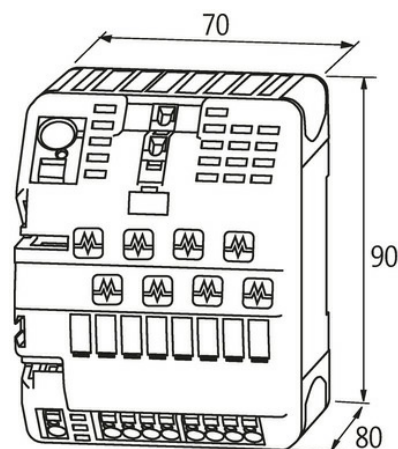


MICO BASIC 8.2 electronic circuit protection, 8 CHANNELS

IN: 24 V DC OUT: 24 V DC / 2 A

[Link a termékhez](#)

Ábrák

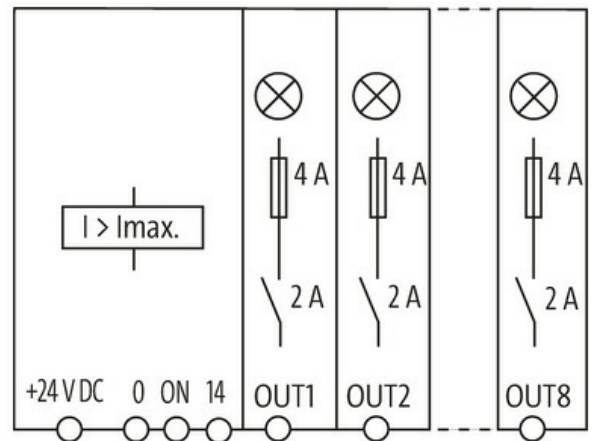

Szimbolikus ábra

Engedélyek

**Busztechnológiák**

Bus technologies

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Dimensions H×W×D	90×70×80 mm
Bridging concept	one side, with spring clamp terminals or bridge set (max. 40 A)
Output terminals	per output 1× 4 mm ²
Input terminals	1× 16 mm ²
Alarm terminals	2.5 mm ²

Output

Inrush capacity	max. 20 mF (per channel)
Current adjustment	2 A

Input

Operating voltage	24 V DC (18...30 V DC)
-------------------	------------------------

Control inputs

Input voltage (ON)	10...30 V DC
Impulse length (ON)	min. 20 ms

Control outputs

Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
--------------------	---

Commercial data

country of origin	CZ
customs tariff number	85363010
EAN	4048879332439
eClass	27371802
Packaging unit	1.000